

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

1 Description

The iW3658 is a highly integrated, high-performance off-line power supply controller for phase-cut dimmable LED luminaires. It uses patented **PrimAccurate**[™] primary-side sensing technology to regulate output current accurately without the need for a feedback circuit. The iW3658 operates at boundary conduction mode to achieve high efficiency and low EMI.

With advanced dimming control technology, the iW3658 can operate with most wall dimmers including leading-edge dimmers (R-type or R-L type) and trailing-edge dimmers (R-C type). The iW3658 operates in buck-boost mode to regulate current to the output LEDs.

Dialog's innovative technology maximizes the iW3658 performance with an integrated high-voltage MOSFET in an SO-7 package, which provides an extra pin spacing between the high voltage MOSFET's drain and low voltage pins. With Dialog's proprietary V_{CC} regulation circuit, the iW3658's V_{CC} level is well maintained regardless of the LED voltage and dimmer phase angle, which eliminates the possibility of low end flickering.

2 Features

- Isolated/non-isolated off-line $120V_{AC}/230V_{AC}$ LED driver up to 15W (Note 1)
- Wide line frequency range (45Hz – 66Hz)
- Excellent dimmer compatibility
 - » Leading-edge dimmer
 - » Trailing-edge dimmer
- Low BOM cost
- Integrated high-voltage MOSFET
- Single-winding inductor
- Internal start-up without the need for high voltage circuit
- Closed-loop constant current regulation
- Built-in LED current derating at high temperature
- Built-in over-temperature shut-down
- LED open and short protection
- Fast start-up (< 0.5s without dimmer)
- Resonant control to achieve high efficiency (typical > 85%)
- Supports Buck-Boost topology

3 Applications

- Dimmable LED retrofit lamps up to 15W (Note 1)

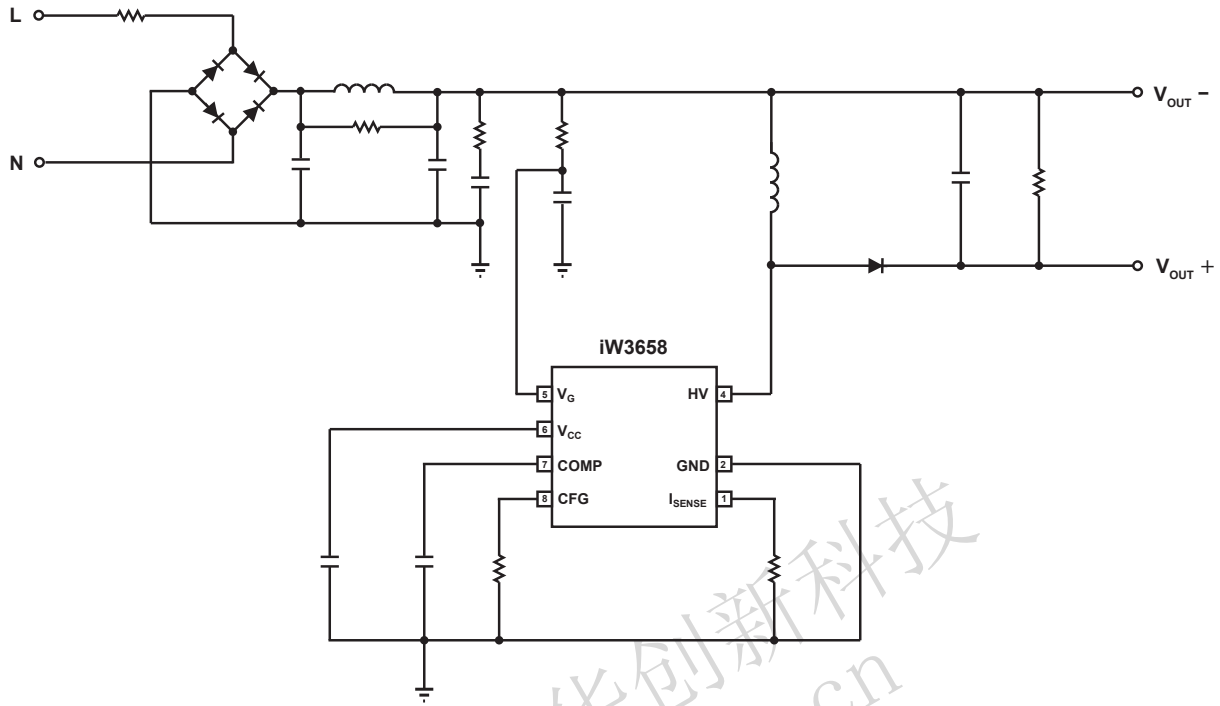


Figure 3.1 : iW3658 Typical Application Circuit

Note 1 : For output power above 12W designs, care should be taken to verify the thermal and reliability constraints on the IC. An IC temperature below 120°C is recommended for proper IC operation.

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

4 Pinout Description

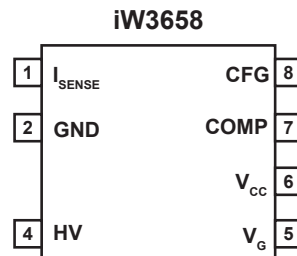


Figure 4.1 : 7-Lead SO Package

| Pin Number | Pin Name | Type | Pin Description |
|------------|-------------|-------------|------------------------------------------------|
| 1 | I_{SENSE} | Analog | Current sense |
| 2 | GND | Ground | Ground reference |
| 4 | HV | Analog | Internal high voltage MOSFET drain |
| 5 | V_G | Analog | Internal high voltage MOSFET gate |
| 6 | V_{CC} | Power Input | Power supply to control logic and MOSFET drive |
| 7 | COMP | Analog | Constant current regulation loop compensation |
| 8 | CFG | Analog | OVP level configuration |

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

| Parameter | Symbol | Value | Units |
|----------------------------------------|---------------|--------------|-------|
| DC supply voltage range (pin 6) | V_{CC} | -0.3 to 6.0 | V |
| V_G (pin 5) | | -0.3 to 18.0 | V |
| COMP (pin 7) | | -0.3 to 6.0 | V |
| HV (pin 4) | | 500 or 650 | V |
| I_{SENSE} (pin 1) | | -0.3 to 6.0 | V |
| CFG (pin 8) | | -0.3 to 6.0 | V |
| Maximum junction temperature | T_{JMAX} | 150 | °C |
| Operating junction temperature | T_{JOPT} | -40 to 150 | °C |
| Storage temperature | T_{STG} | -65 to 150 | °C |
| Thermal resistance junction-to-ambient | θ_{JA} | 170 | °C/W |
| ESD rating per JEDEC JESD22-A114 | | TBD | V |
| Latch-up test per JESD78D | | TBD | mA |

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

6 Electrical Characteristics

$V_{IN} = 15V$. All values are at $T_A = +25^\circ C$, unless otherwise specified.

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|-----------------------------------------------------|-------------------|-----------------------------------------------|------------------------------|-------|------|----------|
| Current regulation (COMP Pin) | | | | | | |
| Reference output current | V_{IREF} | (-30, -31) | | 0.25 | | V |
| | | (-00C, -20, -21) | | 0.35 | | |
| High clamp voltage | | $R_{CFG} < 58k\Omega$ | $120V_{AC}$ (-00C, -20, -30) | | 0.96 | V |
| | | | $230V_{AC}$ (-21, -31) | | 0.85 | |
| | | $60k\Omega < R_{CFG} < 84k\Omega$ (Note 1) | $120V_{AC}$ (-00C, -20, -30) | | 0.8 | |
| | | | $230V_{AC}$ (-21, -31) | | 0.74 | |
| | | $R_{CFG} > 86k\Omega$ (Note 1) | $120V_{AC}$ (-00C, -20, -30) | | 0.66 | |
| | | | $230V_{AC}$ (-21, -31) | | 0.63 | |
| Low clamp voltage | | | | 0.34 | | V |
| ON/OFF Timing | | | | | | |
| Max ON time | T_{ON_MAX} | | | 9.7 | | μs |
| Min ON time | T_{ON_MIN} | | | 0.490 | | μs |
| Maximum OFF time | T_{OFF_MAX} | | | 250 | | μs |
| Minimum OFF time | T_{OFF_MIN} | At V_{IN} zero-crossing | | TBD | | μs |
| Current sensing (I_{SENSE} Pin) | | | | | | |
| High clamped current sense voltage | $V_{ISNS(CLAMP)}$ | $R_{CFG} < 58k\Omega$ | | 1.15 | | V |
| | | $60k\Omega < R_{CFG} < 84k\Omega$ (Note 1) | | 0.92 | | |
| | | $R_{CFG} > 86k\Omega$ (Note 1) | | 0.74 | | |
| Over current protection | | | | 1.1 | | V |
| Supply (V_{CC} Pin) | | | | | | |
| Operating voltage | V_{CC} | | | 5 | 5.5 | V |
| Start-up threshold | $V_{CC(ST)}$ | V_{CC} rising | | 5.2 | | V |
| Under voltage lockout threshold | $V_{CC(UVLO)}$ | V_{CC} falling | | 3.45 | | V |
| Operating current | I_{CCQ} | | | 500 | | μA |
| Charging current | | Before POR | | 0.95 | | mA |
| Discharging current | | | | 9 | | mA |
| Power FET (HV Pin) | | | | | | |
| On-state Resistance | R_{ON} | | | 3 | | Ω |
| Leakage Current (Note 2) | I_{DSS} | (-00C, -20, -30) (Note 3) | | | 1 | μA |
| | | (-21, -31) (Note 4) | | | 1 | μA |

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

6. Electrical Characteristics (Cont'd)
 $V_{IN} = 15V$. All values are at $T_A = +25^{\circ}C$, unless otherwise specified.

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|-----------------------------------------|------------------|--------------------------|-----|------|-----|-------------|
| Gate Bias (V_G Pin) | | | | | | |
| Zener | | At biasing current 0.1mA | | 17.3 | | V |
| Configuration (CFG Pin) | | | | | | |
| Configuration current | $I_{CFG(CFG)}$ | | | 14 | | μA |
| Thermal Shutdown | | | | | | |
| Shutdown threshold | $T_{OTP(START)}$ | | | 150 | | $^{\circ}C$ |

Notes:

- Note 1. These parameters are not tested. Parameters are guaranteed by design.
- Note 2. Tested at $V_G = 0V$.
- Note 3. Tested at $V_{HV} = 500V_{DC}$.
- Note 4. Tested at $V_{HV} = 650V_{DC}$.

深圳市光华创新科技
 www.kwanghua.cn

7 Typical Performance Characteristics

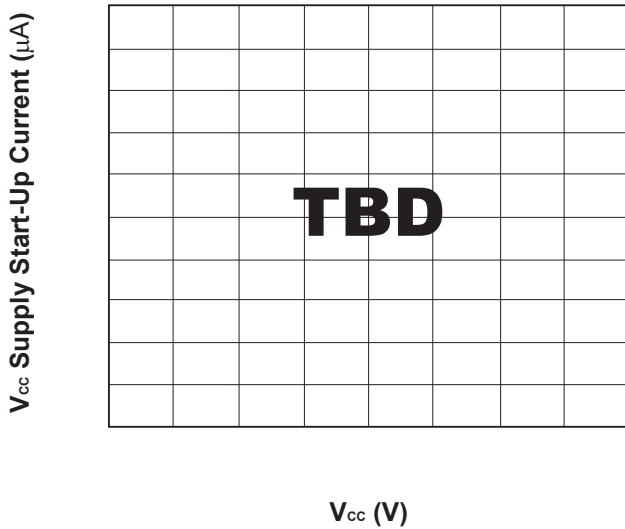


Figure 7.1 : V_{CC} vs. V_{CC} Supply Start-up Current

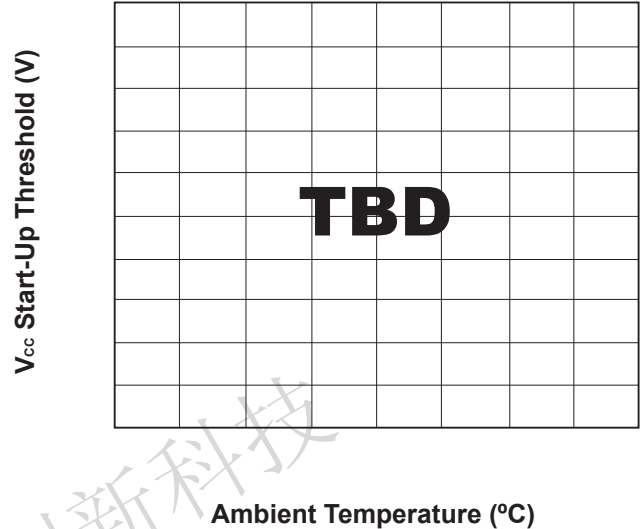


Figure 7.2 : Start-Up Threshold vs. Temperature

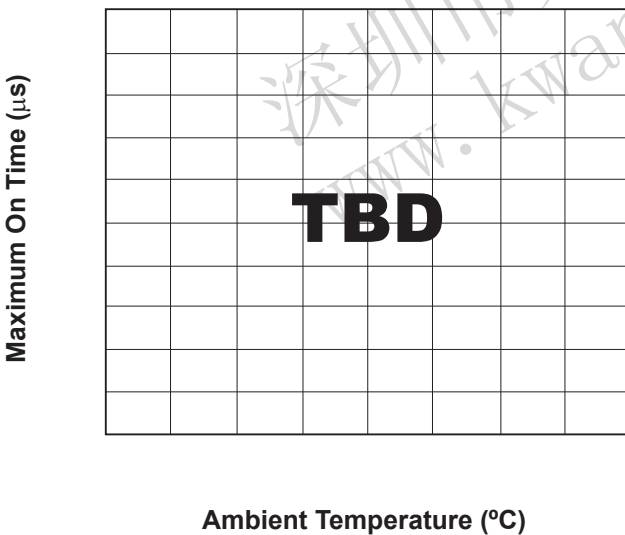


Figure 7.3 : Maximum On Time vs Temperature

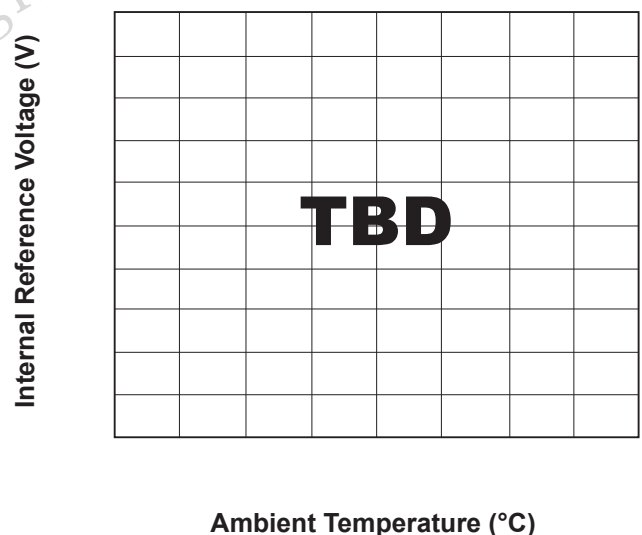


Figure 7.4 : Internal Reference V. vs. Temperature

8 Functional Block Diagram

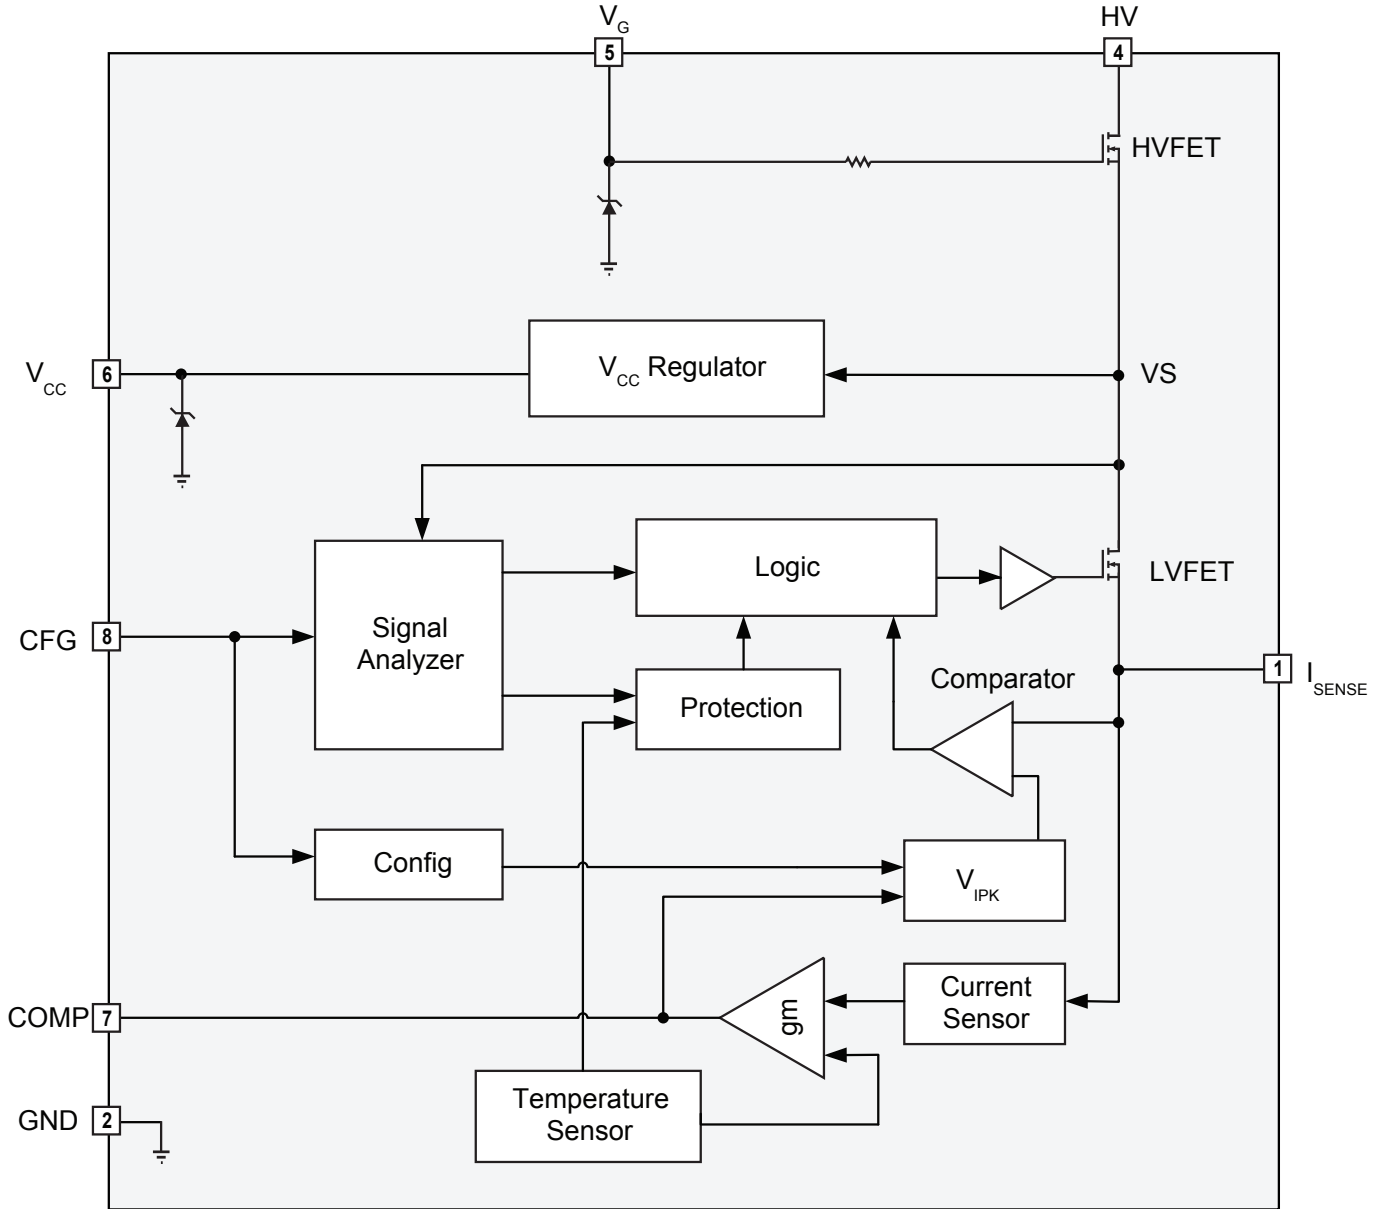


Figure 8.1 : Functional Block Diagram

9 Theory of Operation

9.1 System Startup

When AC voltage is applied, the V_G pin of the iW3658, which is connected to the gate of the internal high voltage MOSFET (HVFET), is charged up through an external pull up resistor. When $V_{GS} > V_{GS(TH)}$, the HVFET is turned on and charges the V_{CC} capacitor. When the V_{CC} voltage reaches the V_{CC} startup threshold, $V_{CC(ST)}$, the iW3658 control circuit is activated and the IC powers up.

After the iW3658 is powered up, it measures the external resistance at the CFG pin in order to configure the control parameters. The CFG pin outputs I_{CFG} current and measures the voltage developed at the pin. The R_{CFG} resistance is used to determine the appropriate maximum COMP pin voltage, $V_{COMP(MAX)}$, and the minimum COMP pin voltage, $V_{COMP(MIN)}$. See section 9.7 for details.

Once the configuration cycle finishes, the COMP pin voltage charges to $V_{COMP(MIN)}$, the IC begins to switch the internal low voltage MOSFET (V_{LVFET}) and delivers energy to the output.

9.2 Constant Current Regulation

When there is no dimmer, the iW3658 maintains the output current constant. For the buck-boost topology, the output current can be derived by the following equation:

$$I_{OUT} = \frac{1}{2} \times \frac{V_{IPK}}{R_S} \times \frac{T_R}{T_P} \quad (9.1)$$

In which V_{IPK} is the peak voltage of I_{SENSE} pin and R_S is the current sense resistor value. T_R is the de-magnetizing time of the main power inductor and T_P is the switching period.

The output current feedback, I_{OUT_FB} , is estimated by sampling the peak current sense voltage V_{IPK} and calculated by equation 9.2.

$$V_{IPK} \times \frac{T_R}{T_P} = 2 \times I_{OUT} \times R_S \quad (9.2)$$

The result is proportional to the output current I_{OUT} and scaled by $2 \times R_S$. I_{OUT_FB} is then compared with internal current reference V_{IREF} for a closed-loop current control.

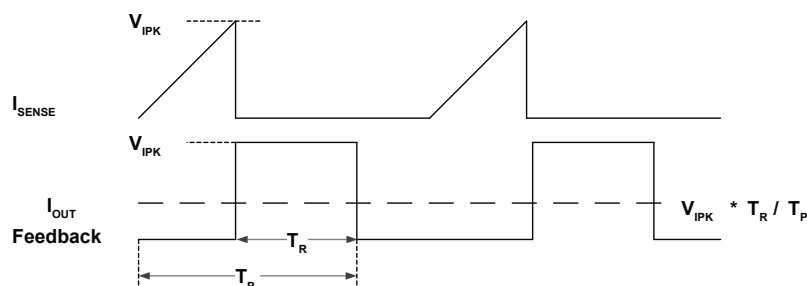


Figure 9.1 : Constant Current Regulation

An external capacitor (2.2 μ F typical) is connected from the COMP pin to keep the LED current stable.

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

9.3 Switching Control

The COMP pin voltage is used to regulate the output current by setting either the peak current of the main inductor or turn-on time of the LVFET, depending on different iW3658 option.

When steady state is reached, the average of $V_{IPK} * T_R / T_P$ is regulated to the internal V_{IREF} . The LED current is regulated and its value can be adjusted by using different R_S values.

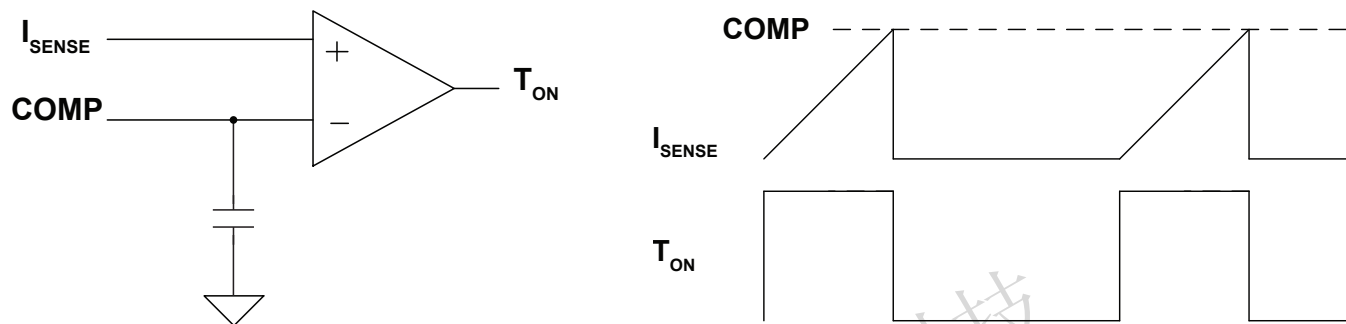


Figure 9.2 : Switching Control

The iW3658 uses Dialog's proprietary ring detection to measure the reset time, T_R , as well as to achieve valley mode switching for best efficiency and EMI. The detection is done at the source of the HVFET, or the drain of LVFET without the need for an external sensing circuit or auxiliary winding.

The iW3658 always operates at CDCM and the switch is turned on at first valley. If the output voltage is too low for the iW3658 to detect the first valley, the iW3658 starts switching at 4kHz, enabling the next switching cycle after approximately 250 μ s.

9.4 AC line Current Control

The iW3658 has two optional operation modes: constant peak current or constant on-time, T_{ON} .

9.4.1 Constant Peak Current Regulation (-00C Option)

In constant current mode, the peak current control value is held constant when AC line voltage is high. Due to the flat distribution of the switching current, the LED current ripple is lower when compared to traditional constant T_{ON} control. At zero-crossing, T_{ON} is clamped to a maximum 9 μ s to avoid excessive AC current. This mode of operation can achieve power factor in the range of 0.7 to 0.9 depending on the application. The LED current is regulated by controlling the value of peak of I_{SENSE} voltage.

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

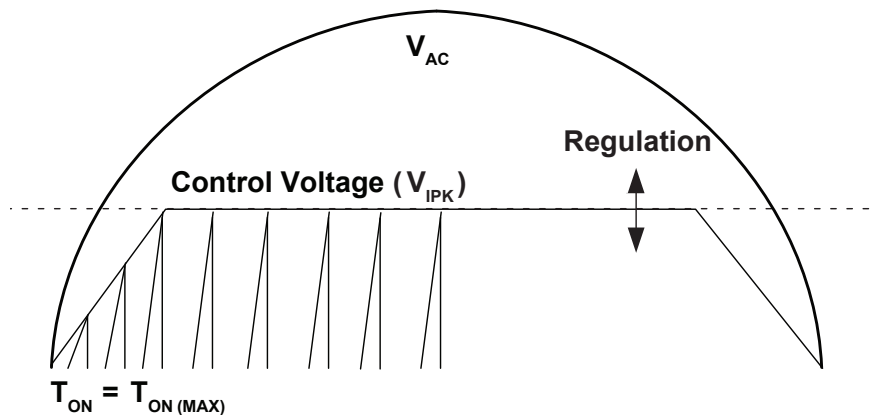
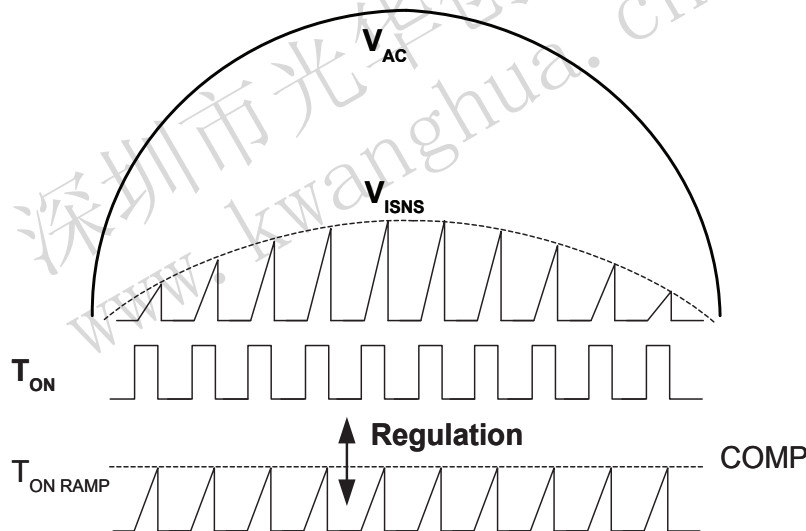


Figure 9.3 : Constant Peak Current Regulation

9.4.2 Constant T_{ON} Regulation (-20, -21, -30 and -31 Options)

In constant T_{ON} mode the COMP pin voltage is compared with a constant slope ramp. T_{ON} is set by the time that ramp voltage is lower than COMP pin voltage. In this way, constant T_{ON} is achieved throughout the AC half cycle. The LED current is higher when COMP pin voltage is higher or vice versa.

Figure 9.4 : Constant T_{ON} Regulation

9.5 V_{CC} Charging and Maintenance

The iW3658 uses Dialog's proprietary V_{CC} charging technology to achieve V_{CC} maintenance regardless of LED voltage or dimming phase angle. Also, it eliminates the need for high voltage resistors which cause extra power loss and additional BOM components.

The charge of V_{CC} is done by utilizing a portion of the primary inductor current. An internal regulation loop automatically adjusts the pulse width of the V_{CC} charging time under different dimming angles. Although the V_{CC} voltage drops during the phase cut of an AC half cycle, the iW3658 guarantees V_{CC} level is always above $V_{CC(UVLO)}$ when a proper sized V_{CC} capacitor is used.

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

9.6 Dimming Operation

If there is no dimmer connected to the driver, the iW3658 regulates a constant output current which is set by the current sense resistor, R_S .

If a phase-cut dimmer is used, the iW3658 uses maximum clamp voltage V_{COMP} or maximum $T_{ON-TIME}$ to reduce the output current with phase-cut. V_{COMP} or maximum $T_{ON-TIME}$ are determined by R_{CFG} resistance. Refer to section 9.7 for the details of V_{COMP} .

9.7 Configuration

R_{CFG} is used to set the maximum COMP pin voltage and maximum T_{ON} . Table 9.1 shows V_{COMP} according to R_{CFG} value. Based on the operation principle of flyback topology, the higher the output voltage, the lower the R_{CFG} value, thus the higher V_{COMP} needs to be. The V_{COMP} values listed in table 9.1 are the values recommended for designing with the iW3658 and correspond to the maximum level expected for V_{COMP} on average. The $V_{COMP(MIN)}$ is 0.34V.

| R_{CFG} Range | V_{COMP} | | T_{ON} High Limit | |
|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | 120V _{AC} (-00C, -20, -30) | 230V _{AC} (-21, -31) | 120V _{AC} (-20, -30) | 230V _{AC} (-21, -31) |
| $R_{CFG} < 58k\Omega$ | 0.96V | 0.85V | 7.68 μ s | 3.40 μ s |
| $60k\Omega < R_{CFG} < 84k\Omega$ | 0.80V | 0.74V | 6.40 μ s | 2.96 μ s |
| $R_{CFG} > 86k\Omega$ | 0.66V | 0.63V | 5.28 μ s | 2.52 μ s |

Table 9.1: R_{CFG} Values

In typical applications, 59k Ω maps to 65V output voltage and 85k Ω maps to 45V output voltage.

9.8 Protections

9.8.1 Output Over-Voltage Protection (OVP)

The iW3658 detects the output over-voltage condition indirectly by measuring the reset time of the main inductor using the following equation:

$$V_{OUT} = \frac{V_{IPK}}{T_R} \times \frac{L_M}{R_S} \quad (9.3)$$

For a certain V_{IPK} , which is known to the iW3658, the inductor reset time T_R is inversely proportional to the output voltage. Therefore, for given L_M/R_S and V_{IPK} values, the output voltage can be detected by the reset time T_R . By setting a time value T_{R_OVP} , as the target over voltage threshold, if the measured T_R is shorter than T_{R_OVP} , then the output voltage is considered to be too high and will trigger the OVP protection.

The iW3658 sets the OVP level via the R_{CFG} resistor by the following equation:

$$V_{OVP} = \frac{L_M}{R_S} \times \frac{5 \times 10^9}{R_{CFG}} \quad (9.4)$$

9.8.2 Inductor Peak Current Limit

The maximum I_{SENSE} voltage $V_{ISNS(CLAMP)}$ is set by R_{CFG} . Once the I_{SENSE} voltage reaches $V_{ISNS(CLAMP)}$, the power switch will be turned off immediately, then start again in the next switching cycle. This avoids the main inductor from saturating.

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

9.8.3 Output Over-Current Protection

If the output is short circuited, the iW3658 will operate at approximately 4kHz to reduce the power.

9.8.4 Thermal Derating and Over-Temperature Protection (OTP)

The iW3658 has an internal OTP shutdown at 150°C junction temperature. The iW3658 also has built-in LED current derating. The derating start point is at 140°C junction temperature. If the junction temperature reaches 140°C, the iW3658 reduces current to the LEDs at a rate of 6% per 6°C. The picture below shows the OTP de-rating curve. The maximum derating range is down to 88% of full output current.

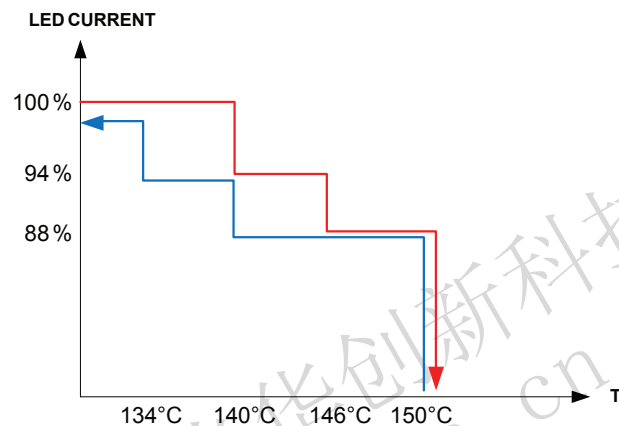


Figure 9.5 : Over-Temperature Derating Protection Characteristic

9.9 Application Guide

9.9.1 Current Sense Resistor (R_s)

LED current is set by current sense resistor. R_s value can be determined by the following equation. It does not depend on AC or LED voltage.

$$R_{SNS} = \frac{V_{IREF}}{2 \times I_{LED} \times \eta} \quad (9.5)$$

In which, V_{IREF} is an internal output current reference; η is power stage efficiency, 92% is a good estimate to start with; I_{LED} is the full power output current.

9.9.2 Configuration Resistor (R_{CFG})

R_{CFG} sets the over voltage protection threshold. It can be determined by the following equation:

$$R_{CFG} = \frac{\frac{L_M}{R_S}}{V_{OVP}} \times 5 \times 10^9 \Omega \quad (9.6)$$

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

9.9.3 Main inductor (L_M)

L_M determines the switching frequency. The following equation is recommended:

For typical application:

$$\frac{L_M}{R_S} = 800\mu\text{H}/\Omega \text{ to } 1200\mu\text{H}/\Omega \quad (9.7)$$

9.9.4 V_{CC} Capacitor, COMP Capacitor and V_G Pull-Up Resistor and Capacitor

Table 9.3 shows recommended values and voltage ratings for different key components.

| Item | Value | Rating |
|----------------|-------------------------------------------|-----------|
| V_{CC} cap | 6.8 μ F to 22 μ F | 10V |
| COMP cap | 2.2 μ F | 10V |
| V_G cap | 0.1 μ F to 0.22 μ F | 50V |
| V_G resistor | 1M Ω for 120V/2M Ω for 230V | 250V/400V |


Table 9.3: Recommended capacitor and resistor values for V_{CC} , COMP and V_G

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

10 Physical Dimensions

7-Lead Small Outline (SOIC) Package

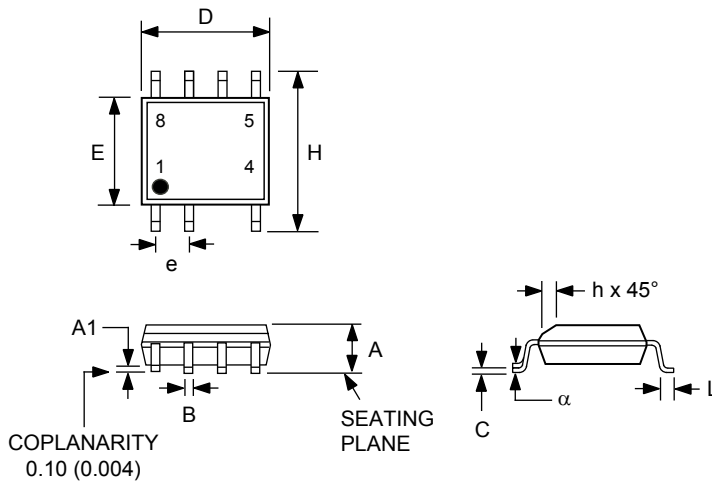

| Symbol | Inches | | Millimeters | |
|----------|----------|--------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | — | 0.069 | — | 1.75 |
| A1 | 0.004 | 0.0098 | 0.1 | 0.25 |
| B | 0.013 | 0.02 | 0.33 | 0.51 |
| C | 0.0075 | 0.0098 | 0.19 | 0.25 |
| D | 0.189 | 0.197 | 4.8 | 5 |
| E | 0.151 | 0.157 | 3.84 | 3.99 |
| e | 0.05 BSC | | 1.27 BSC | |
| H | 0.2284 | 0.244 | 5.8 | 6.2 |
| h | — | — | — | — |
| L | 0.02 | 0.03 | 0.51 | 0.76 |
| α | — | — | 0° | 8° |

Compliant to JEDEC Standard MS12F

Controlling dimensions are in inches; millimeter dimensions are for reference only

This product is RoHS compliant and Halide free.

Soldering Temperature Resistance:

[a] Package is IPC/JEDEC Std 020D Moisture Sensitivity Level 1

[b] Package exceeds JEDEC Std No. 22-A111 for Solder Immersion Resistance; package can withstand 10 s immersion < 260°C

Dimension D does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15 mm per end. Dimension E1 does not include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.25 mm per side.

The package top may be smaller than the package bottom. Dimensions D and E1 are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs and interlead flash, but including any mismatch between the top and bottom of the plastic body.

11 Ordering Information

| Part no. | Options | Package | Description |
|------------|---------------------------------------------------------------------------|---------|--------------------------|
| iW3658-00C | 120V _{AC} Input, 500V/3A MOSFET | SO-7 | Tape & Reel ¹ |
| iW3658-20 | 120V _{AC} Input, 500V/3A MOSFET, optimized for high power factor | SO-7 | Tape & Reel ¹ |
| iW3658-21 | 230V _{AC} Input, 650V/2A MOSFET, optimized for high power factor | SO-7 | Tape & Reel ¹ |
| iW3658-30 | 120V _{AC} Input, 500V/3A MOSFET, optimized for filament load | SO-7 | Tape & Reel ¹ |
| iW3658-31 | 230V _{AC} Input, 650V/2A MOSFET, optimized for filament load | SO-7 | Tape & Reel ¹ |

Note 1: Tape and reel packing quantity is 2,500/reel. Minimum ordering quantity is 2,500.

AC/DC Power Controller for Dimmable LED Drivers with Internal High-Voltage MOSFET

Company Confidential

Disclaimer

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including without limitation the specification and the design of the related semiconductor products, software and applications.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Customer notes that nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document are subject to [Dialog Semiconductor's Standard Terms and Conditions of Sale](#), available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog and the Dialog logo are trademarks of Dialog Semiconductor plc or its subsidiaries. All other product or service names are the property of their respective owners.

© 2017 Dialog Semiconductor. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)
Dialog Semiconductor (UK) LTD
Phone: +44 1793 757700

Germany
Dialog Semiconductor GmbH
Phone: +49 7021 805-0

The Netherlands
Dialog Semiconductor B.V.
Phone: +31 73 640 8822

Email
info_pcbg@diasemi.com

North America
Dialog Semiconductor Inc.
Phone: +1 408 845 8500

Japan
Dialog Semiconductor K. K.
Phone: +81 3 5425 4567

Taiwan
Dialog Semiconductor Taiwan
Phone: +886 281 786 222

Web site:
www.dialog-semiconductor.com

Singapore
Dialog Semiconductor Singapore
Phone: +65 64 8499 29

Hong Kong
Dialog Semiconductor Hong Kong
Phone: +852 3769 5200

Korea
Dialog Semiconductor Korea
Phone: +82 2 3469 8200

China (Shenzhen)
Dialog Semiconductor China
Phone: +86 755 2981 3669

China (Shanghai)
Dialog Semiconductor China
Phone: +86 21 5424 9058